


Masterlink MF Classic

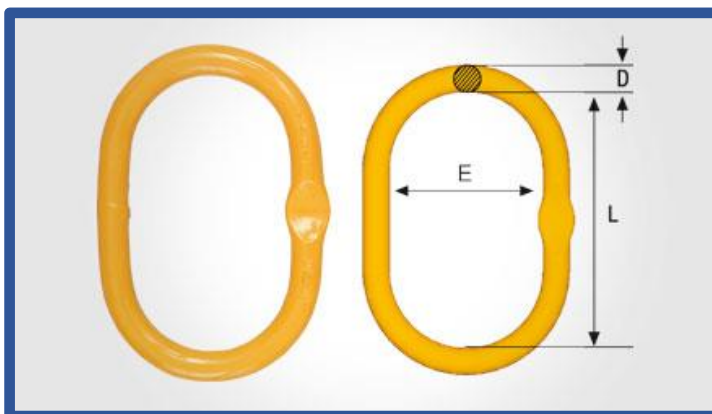

With flattened section for use with BL.

If used for chain, check for corresponding WLL values in the WLL table acc EN818-4.

Fulfills requirements in:

EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.

Safety factor 4:1

All dimensions in mm

Code	WLL t (SF 5:1) EN 1677-4	WLL t (SF 5:1) ASTM A-952	For chain mm, 1-leg	For chain mm, 2-leg	L	E	D	Weight kgs
MF-86-10	2.5	3.2	7, 8	6	125	70	14	0.45
MF-108-10	4.0	5.2	10	7, 8	140	80	17	0.765
MF-1310-10	7.5	8.0	13	10	160	95	22	1.434
MF-1613-10	10.0	13.6	16	13	190	110	28	2.801
MF-2016-10	17.0	20.6	19, 20	16	240	140	34	5.231
MF-2220-10	25.0	30.9	22	20	250	150	40	7.729