


Chain KLB, Classic Grade 8

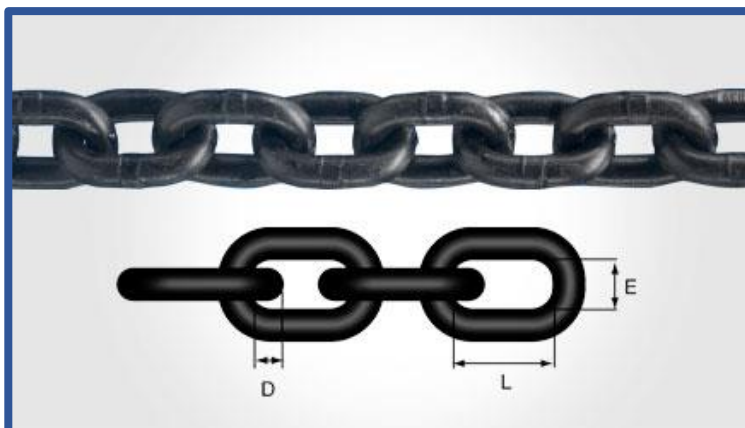

Heat treatment – quenched and tempered.

Surface treatment – painted black.

Safety factor – 4:1.

Fulfills the requirements in EN 818-2:2008, AS 2321:2014, ASTM A391/A 391M-07 (2012)

Dimensions in mm.

Code	Length m	WLL t	ØD	L	E	MPF	Breaking Force (kN)	Weight kgs
KLB-6-8E	1x200	1.12	6	18	8.5	28.3	45.2	0.84
KLB-7-8E	1x200	1.57	7	21	10.0	38.5	62	1.14
KLB-8-8E	1x200	2.0	8	24	11.0	50.3	80.6	1.41
KLB-10-8E	1x100	3.2	10	30	14.0	79	130	2.25
KLB-13-8E	1x100	5.4	13	39	17.7	133	214	3.76
KLB-16-8E	1x100	8.2	16	48	21.9	201	322	5.64
KLB-19-8E	1x100	11.6	19	57	27.0	284	457	7.78
KLB-22-8E	1x50	15.5	22	66	29.5	380	610	10.64
KLB-26-8E	1x50	21.6	26	78	35.0	531	850	14.8
KLB-32-8E	1x25	32.8	32	96	44.6	804	1300	21.6